




Radius RX -1000 Electro-Pneumatic Positioner with Optional Limit Switches and Transmitter

Product Specifications:

- Input: 4-20mA DC
- Impedance: 250 ± 15 Ohm
- Supply Pressure: 20-100PSI
- Stroke: 0-90"
- Air Connection: 1/4" NPT
- Gauge Connection: 1/8" NPT
- Conduit: 1/2"
- Protection: IP66
- Ambient Temp: -4°F~158°F (Operating Temp.)
- Linearity: $\pm 1\%$ F.S.
- Hysteresis: $\pm 1\%$ F.S.
- Sensitivity: $\pm 0.2\%$ F.S.
- Repeatability: $\pm 0.5\%$ F.S.
- Air Consumption: 0.11 scfm
- Flow Capacity: 2.83 scfm
- Material: Aluminum Diecasting
- Weight: 6.2 lbs.

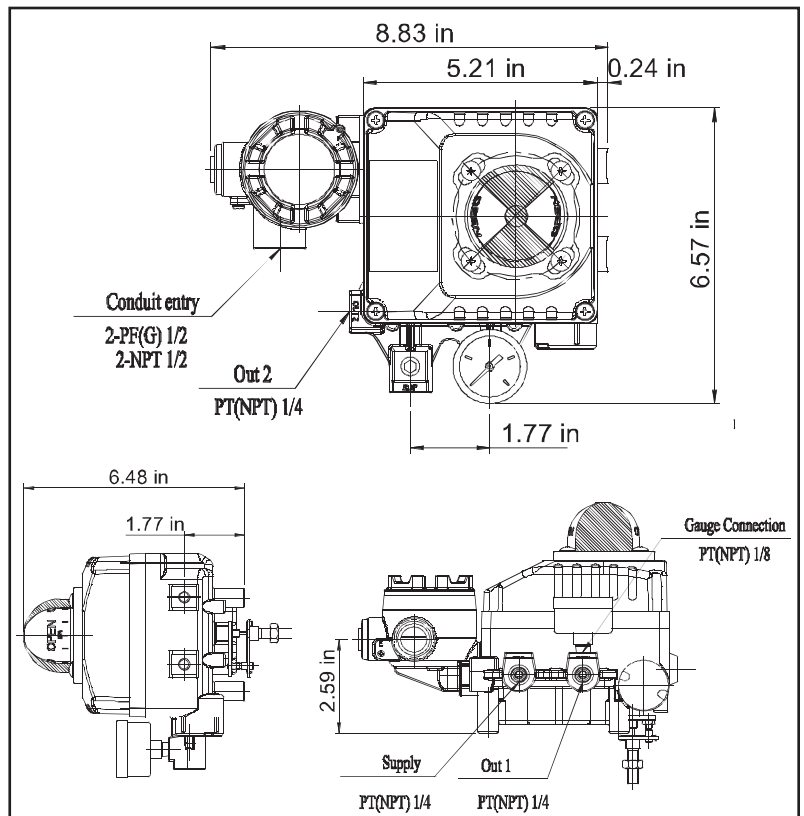

Radius LLC is ISO 9001:2015 Certified.

Ordering Code

RX-1000-□□□□

Options

2LS - with Limit Switches

2TLS - with Limit Switches and 4-20mA transmitter